
Project: “GR-INNO – SGS2 Soft Measures HWEA/ELETAEN”

Deliverable of Task 1.1

Definition of a typical Greek offshore wind farm and a reference turbine
Definition of a set of technical specifications

Project Promoter:



September 2023

Funded by:

Iceland
Liechtenstein
Norway grants



Supported by a grant from Iceland, Liechtenstein and Norway through the EEA Grants 2014-2021, in the frame of the Programme "Business Innovation Greece", within the project GR-INNO-SGS2 Soft Measures - HWEA/ELETAEN.

Iceland 
Liechtenstein
Norway grants

 Innovation
Norway

Table of Contents

| | | |
|----------|--|-----------|
| 1 | EXECUTIVE SUMMARY | 6 |
| 2 | INTRODUCTION | 7 |
| 3 | REFERENCE WIND FARM | 8 |
| 3.1 | SIZING | 8 |
| 3.2 | WIND CONDITIONS [1]..... | 8 |
| 3.3 | WAVE CONDITIONS [2] | 8 |
| 4 | REFERENCE WIND TURBINE | 9 |
| 4.1 | KEY PARAMETERS FOR THE 15MW REFERENCE WIND TURBINE | 9 |
| 4.1.1 | <i>Rotor and RNA</i> | 9 |
| 4.1.2 | <i>Offshore Support Structures</i> | 10 |
| 4.2 | SUBSYSTEMS' DETAILS AND STAGING NEEDS | 14 |
| 4.2.1 | <i>Blades</i> | 14 |
| 4.2.2 | <i>Drivetrain and Hub</i> | 15 |
| 4.2.3 | <i>Floating Tower</i> | 16 |
| 5 | HARBOUR NEEDS | 17 |
| 5.1 | REFERENCE TURBINE AND WIND FARM STAGING NEEDS..... | 17 |
| 5.2 | SOIL BEARING CAPACITY | 17 |
| 5.3 | DRAFT..... | 17 |
| 6 | CONCLUSIONS | 18 |

Table of Tables

| | |
|---|----|
| <i>Table 1: Key parameters for the 15MW Reference Wind Turbine</i> | 9 |
| <i>Table 2: Key parameters for the Offshore Support Structures of the 15MW Reference Wind Turbine</i> | 10 |
| <i>Table 3: Key parameters for the Semisubmersible Platform and its Mooring system</i> | 12 |
| <i>Table 4: Key parameters for the 15MW reference wind turbine blades</i> | 14 |
| <i>Table 5: Staging needs for the 15MW reference wind turbine blades</i> | 14 |
| <i>Table 6: Key parameters for the 15MW reference wind turbine drivetrain and hub</i> | 15 |
| <i>Table 7: Staging needs for the 15MW reference wind turbine drivetrain and hub</i> | 16 |
| <i>Table 8: Key parameters for the 15MW reference wind turbine floating tower</i> | 16 |
| <i>Table 9: Staging needs for the 15MW reference wind turbine floating tower</i> | 16 |
| <i>Table 10: Staging needs for the reference wind turbine and wind farm</i> | 17 |

Table of Figures

| | |
|--|----|
| <i>Figure 1: The hub-drivetrain arrangement of the IEA 15MW Wind Turbine (Source: [1])</i> | 10 |
| <i>Figure 2: The 15MW floating support structure designed by the University of Maine (Source: [5])</i> | 13 |

Abbreviations

| | |
|--------|---|
| a.s.l. | Above Sea Level |
| IEC | International Electrotechnical Commission |
| LCoE | Levelized Cost of Electricity |
| RNA | Rotor-Nacelle Assembly |
| SWH | Significant Wave Height |

1 EXECUTIVE SUMMARY

This is the Task 1.1 deliverable of the project “GR-INNO – SGS2 Soft Measures – HWEA/ELETAEN” granted from the “EEA Financial Mechanism 2014-2021, Business Development, Innovation and SMEs “Business Innovation Greece” programme. The project promoter is HELLENIC WIND ENERGY ASSOCIATION ELETAEN NON-PROFIT ORGANISATION (ELETAEN NPO) collaborating with the project partner Marin Energi Testsenter As (NOW). The project will contribute to the following outcomes: i) Increased competitiveness of Greek enterprises within the focus area of Blue Growth and ii) Enhanced business collaboration between Greek entities and Beneficiary State entities.

Task 1 of the project aims in the analysis of the supply chain of offshore wind development in Greece. In that, subtask 1.1 defines a typical Greek offshore wind farm and a reference turbine, as well as a set of technical specifications (weights, staging area needed, minimum water depth, etc) needed for the rest of the project.

Two typical Greek offshore wind farms and a reference turbine are defined. The reference wind farms address medium (50m) and higher (200m) sea depths. The installed capacity is 300MW in both cases. The turbines offshore support structures are jackets in the first case and semisubmersible floaters with catenary mooring lines in the second. The metocean conditions assumed for the two cases are typical for Aegean Sea. The bottom-fixed site has a mean annual wind speed of 8.2m/s, significant wave height 0.8m and wave peak period 4.2s. The floating site is rougher, with mean annual wind speed of 9.6m/s, significant wave height of 1.2m and peak period 5.0s.

The IEA 15MW offshore wind turbine is selected as the reference turbine. It is a typical three-bladed upwind design, with variable speed and pitch control, having a rotor diameter of 240m and hub-height 150m.

Using the reference wind farm(s) and turbine characteristics one can obtain a set of prerequisites / technical specifications (weights, staging area, minimum water depth, etc) necessary for assessing the specific needs for harbours and the elements of the supply chain. It is seen, for instance, that the development of the 300MW reference wind farm an area of 25Ha is needed as a minimum for the staging of the “dry” wind turbines’ components, the bearing capacity of the staging soil might need strengthening to host heavy equipment, while the exit from the harbour should support a minimum draft of 12m (it might be less for other floater designs and assembly practices).

2 INTRODUCTION

This is the Task 1.1 deliverable of the project “GR-INNO – SGS2 Soft Measures – HWEA/ELETAEN” granted from the “EEA Financial Mechanism 2014-2021, Business Development, Innovation and SMEs “Business Innovation Greece” programme. The project promoter is HELLENIC WIND ENERGY ASSOCIATION ELETAEN NON-PROFIT ORGANISATION (ELETAEN NPO) collaborating with the project partner Marin Energi Testsenter As (NOW). The project will contribute to the following outcomes: i) Increased competitiveness of Greek enterprises within the focus area of Blue Growth and ii) Enhanced business collaboration between Greek entities and Beneficiary State entities.

Task 1 of the project aims in the analysis of the supply chain of offshore wind development in Greece. The starting subtask 1.1 defines a typical Greek offshore wind farm and a reference turbine, as well as a set of technical specifications (weights, staging area needed, minimum water depth, etc) needed for the rest of the project.

Chapter 3 of this report describes two reference wind farms (a bottom fixed and a floating) operating under typical Aegean Sea metocean conditions.

Chapter 4 of the report details the key parameters and technical characteristics of a generic 15MW wind turbine that will be used in the reference wind farms. Depending on the case, the reference turbine is supported by a jacket (bottom-fixed) or a semi-submersible floater (floating) anchored by catenary mooring lines.

Harbour needs for the staging, assembly and transportation of the “dry” components of the reference wind farm are discussed in Chapter 5.

3 REFERENCE WIND FARM

This chapter provides the key parameters of the reference wind farm(s) that will be used in the project. It addresses sizing of the wind farm (installed capacity, turbine type, number of turbines and a typical layout), water depth, as well as metocean conditions for wind and wave (currents are not considered). Two reference offshore wind farms are considered, one with bottom-fix and another with floating wind turbines. The metocean conditions used for the reference wind farms are typical for the Aegean Sea.

3.1 SIZING

For both bottom-fix and floating reference wind farms the installed capacity is **300MW**, comprising **20X15MW** turbines of the “reference” type presented in the next chapter. The reference turbine is of IEC Class IB and has **240m** diameter and **150m** hub-height. The 20 turbines layout assumes **7DX5D** distances between the turbines, 7D (1680m) in the prevailing wind direction and 5D (1200m) in the normal to the prevailing direction. A 5X4 turbines layout requires a deployment area of **~25km²**.

The mean sea depth for the bottom fixed turbines is **50m** with the offshore support structure being of the jacket type. The mean sea depth for the floating turbines is **200m** with the offshore support structure being of the semisubmersible type with a chain catenary mooring system. Details of the offshore support structures are presented in the following chapters.

3.2 WIND CONDITIONS [1]

The wind conditions assumed for the two reference wind farms at their hub-height are:

For bottom-fixed turbines

- Mean annual wind speed (m/s) : 8.2
- Weibull shape factor k : 2.4
- Prevailing wind direction (°) : 340

For floating turbines

- Mean annual wind speed (m/s) : 9.6
- Weibull shape factor k : 2.0
- Prevailing wind direction (°) : 305

3.3 WAVE CONDITIONS [2]

For bottom-fixed turbines

- Mean significant wave height (m) : 0.8
- 50-years extreme SWH (m) : 4.6
- Spectral peak period (s) : 4.2
- Prevailing wave direction (°) : 8

For floating turbines

- Mean significant wave height (m) : 1.2
- 50-years extreme SWH (m) : 6.9
- Spectral peak period (s) : 5.0
- Prevailing wave direction (°) : 314

4 REFERENCE WIND TURBINE

The IEA 15MW Wind Turbine [1] has been selected as the reference turbine of the present assignment. This is an offshore turbine, originally supported by a monopile. A bottom-fixed version of the same turbine for deeper waters (~50m) supported by a jacket substructure has been obtained in the present context using the INNWIND.EU¹ reference jacket upscaled to 15MW using the INNWIND.EU cost model [4]. A floating version of the IEA 15MW turbine for water depths ~200m has been also defined in [5].

4.1 KEY PARAMETERS FOR THE 15MW REFERENCE WIND TURBINE

4.1.1 Rotor and RNA

Table 1 presents the key parameters of the 15MW Reference Wind Turbine. It has a 3-bladed, upwind, pitch variable rotor with a direct drive drivetrain. The Table shows under the column “IEA 15-MW Turbine” the values of the relevant parameters as provided in [1], while in column “Innwind.EU” the corresponding values have been obtained through the upscaling of the INNWIND.EU 10MW turbine using the upscaling and cost modelling tool of [4]. It is seen that the two parameters’ sets are quite identical, strengthening thus the representativity of the 15MW design.

Table 1: Key parameters for the 15MW Reference Wind Turbine

| Key Parameters | | IEA 15-MW Turbine | Innwind.EU |
|-----------------------------|------------------|---------------------------------|--------------|
| Parameter | Units | Value | Value |
| Power rating | MW | 15 | 15 |
| Turbine class | - | IEC Class 1B | IEC Class 1B |
| Specific rating | W/m ² | 332 | ././. |
| Rotor orientation | - | Upwind | ././. |
| Number of blades | - | 3 | ././. |
| Control | - | Variable speed Collective pitch | ././. |
| Cut-in wind speed | m/s | 3 | ././. |
| Rated wind speed | m/s | 10.59 | ././. |
| Cut-out wind speed | m/s | 25 | ././. |
| Design tip-speed ratio | - | 9.0 | ././. |
| Minimum rotor speed | rpm | 5 | ././. |
| Maximum rotor speed | rpm | 7.56 | ././. |
| Maximum tip speed | m/s | 95 | ././. |
| Rotor diameter | m | 240 | ././. |
| Airfoil series | - | FFA-W3 | ././. |
| Hub height | m | 150 | ././. |
| Hub diameter | m | 7.94 | |
| Hub overhang | m | 11.35 | |
| Rotor precone angle | deg | -4 | |
| Blade prebend | m | 4 | |
| Blade mass | t | 65 | 66.5 |
| Drivetrain | - | Direct drive | Medium Speed |
| Shaft tilt angle | deg | 6 | |
| Rotor nacelle assembly mass | t | 1,017 | 1,073 |

For a more detailed description of the IEA design, we quote below relevant expressions used by the reference [1] authors:

¹ INNWIND.EU (<http://www.innwind.eu/>) was a European FP7 project. The overall objective of the INNWIND.EU project was the high-performance innovative design of a beyond-state-of-the-art 10-20MW offshore wind turbine and hardware demonstrators of some of the critical components.

« The blade design was driven by the selection of 240m as the rotor diameter and a maximum tip-speed of 95 meters per second (m/s). A fairly traditional structural configuration was selected, comprising of two main load-carrying, carbon-reinforced spars, connected by two shear webs, with reinforcement along the trailing and leading edge and foam fillers. »

« The 15-MW reference wind turbine uses a direct-drive layout with a permanent-magnet, synchronous, radial flux outer-rotor generator in a simple and compact nacelle layout. The assembly consists of a hub shaft supporting the turbine and generator rotors on two main bearings housed on a stationary turret that is cantilevered from the bedplate. The hub is a simple spherical shell, with cutouts for the blades and the flange. The main shaft has a hollow cylindrical cross section, with a constant wall thickness and a tilt angle of 6°. The main shaft, along with the rotor, is supported by two main bearings. Both these main bearings have rotating outer raceways and fixed inner raceways. The outer raceways and bearing housing are accommodated by a turret held by the bedplate. The entire weight of the turbine rotor, generator rotor, and hub loads are transmitted by the main shaft to the turret via the bearings. The bedplate is a hollow, elliptically curved, cantilever beam with circular cross sections. The yaw system bearings are double-row, angular, contact ball bearings. The generator construction features an external rotor radial flux topology machine with a surface-mounted permanent magnet. »

The drive train design is illustrated in Figure 1.

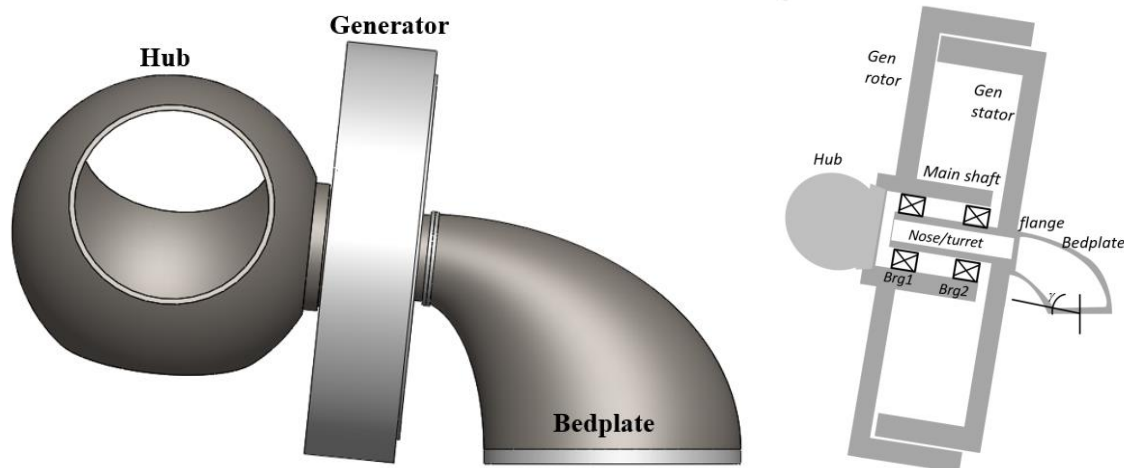


Figure 1: The hub-drivetrain arrangement of the IEA 15MW Wind Turbine (Source: [1])

4.1.2 Offshore Support Structures

Three alternative offshore support structures are considered for the 15MW reference wind turbine. For relatively low (~30m) water depths (w.d.) a monopile design is provided in [1]. For higher water depths (~50m) a jacket substructure can be obtained by upscaling the reference 10MW jacket of the INN-WIND.EU project using [4]. In both the above bottom-fixed cases the same tower is used, starting at 15m a.s.l. and ensuring the hub-height of 150m a.s.l. The third alternative is a semisubmersible floating substructure for deeper waters (~200m) made from steel (see [5]). The floating substructure is accompanied by a new tower design too.

The key parameters of the three offshore support structures discussed above are given in Table 2.

Table 2: Key parameters for the Offshore Support Structures of the 15MW Reference Wind Turbine

| Monopile Version (30m w.d.) | | IEA 15-MW Turbine | Innwind.EU |
|--|--------------|---------------------------|-------------------|
| Parameter | Units | Value | |
| Transition piece height | m | 15 | |
| Monopile length (from t.p. to seabed) | m | 45 | |
| Monopile embedment depth | m | 45 | |
| Monopile base diameter | m | 10 | |
| Tower mass | t | 860 | |
| Monopile mass | t | 1,318 | |
| Jacket Version (50m w.d.) | | IEA 15-MW Turbine | Innwind.EU |
| Parameter | Units | | Value |
| Transition piece height | m | | 15 |
| Jacket length (from t.p. to seabed) | m | | 65 |
| Piles embedment depth | m | | |
| Jacket base diameter | m | | |
| Tower mass | t | | 1,043 |
| Jacket overall mass (incl. tp and piles) | t | | 2,700 |
| Semisubmersible Floater (200m w.d.) | | IEA 15-MW Turbine | Innwind.EU |
| Parameter | Units | Value | |
| Excursion1 (Length, Width, Height) | m | 90.1, 102.1, 290.0 | |
| Freeboard | m | 15 | |
| Draft | m | 20 | |
| Total System Mass (incl. ballast) | t | 20,093 | |
| Hull Steel Mass | t | 3914 | |
| Platform Mass (incl. ballast) | t | 17,839 | |
| Tower Mass | t | 1,263 | |
| RNA Mass | t | 991 | |
| Water Depth | m | 200 | |
| Mooring System | - | Three-line chain catenary | |

For more details regarding the floating substructure, we quote below relevant expressions used by the reference [5] authors:

« This part is taken from the work performed by University of Maine (UMaine) VoltturnUS-S on defining a reference floating wind turbine to support the International Energy Agency (IEA)-15-240-RWT 15-megawatt (MW) reference wind turbine. The reference floating offshore wind turbine comprises a floating semisubmersible platform, a chain catenary mooring system, a floating-specific tower, and a modified float-specific controller tuning. The semisubmersible is a generic steel version of the UMaine patented concrete floating foundation technology developed in collaboration with the U.S. Department of Energy. The reference platform is a four-column, steel semisubmersible. The arrangement of the hull comprises three 12.5-m-diameter buoyant columns radially spaced with centers that are 51.75 m from the tower's vertical axis. The platform-tower interface is atop a fourth buoyant column located at the center of the platform in the surge-sway plane. This central column is connected to the outer columns via three 12.5-m-wide-by-7.0-m-high rectangular bottom pontoons and three 0.9-m-diameter radial struts attached to the bottom and top of the buoyant columns, respectively. When on station, the total mass of the platform is 17,854 t, of which 3,914 t is structural steel, 2,540 t is fixed iron-ore-concrete ballast, divided equally and placed at the base of the three radial columns, 11,300 t is a seawater ballast that floods the majority of the three submerged pontoons, and a 100-t tower interface connection detail. When installed, the platform has a draft of 20 m with a 15-m freeboard to the upper deck of the columns. The completely assembled unit displaces 20,206 cubic meters (m³) of seawater (with an assumed density of 1,025 kilograms per cubic meter [kg/m³]), which consists of a 1,263-t (metric tonne) tower, a 991-t RNA, and a 17,839-t ballasted platform with 6,065 kilonewtons (kN) of mooring vertical pretension. The system has an assumed deployment depth of 200 m and is held on to the station by a three-line chain catenary mooring system. The lines of the spread catenary system span radially to anchors located 837.60 m from the tower's centerline. »

Part of the information provided above is summarized in Table 3.

Table 3: Key parameters for the Semisubmersible Platform and its Mooring system

| Semisubmersible Platform Properties | | |
|--|----------------|---------------------------|
| Parameter | Units | Value |
| Hull Displacement | m ³ | 20206 |
| Hull Steel Mass | t | 3914 |
| Tower Interface Mass | t | 100 |
| Ballast Mass (Fixed/Fluid) | t | 2,540/11,300 |
| Draft | m | 20 |
| Freeboard | m | 15 |
| Vertical Center of Gravity from SWL | m | -15 |
| Vertical Center of Buoyancy from SWL | m | -14 |
| Mooring System Properties | | |
| Parameter | Units | Value |
| Mooring System Type | - | Chain Catenary |
| Line Type | - | R3 Studless Mooring Chain |
| Line Breaking Strength | kN | 22,286 |
| Number of Lines | - | 3 |
| Anchor Depth | m | 200 |
| Fairlead Depth | m | 14 |
| Anchor Radial Spacing | m | 837.6 |
| Fairlead Radial Spacing | m | 58 |
| Nominal Chain Diameter | mm | 185 |
| Dry Line Linear Density | kg/m | 685 |
| Extensional Stiffness | MN | 3270 |
| Line Unstretched Length | m | 850 |
| Fairlead Pretension | kN | 2,437 |
| Fairlead Angle from SWL | ° | 56.4 |

The floating platform design is illustrated in Figure 2.

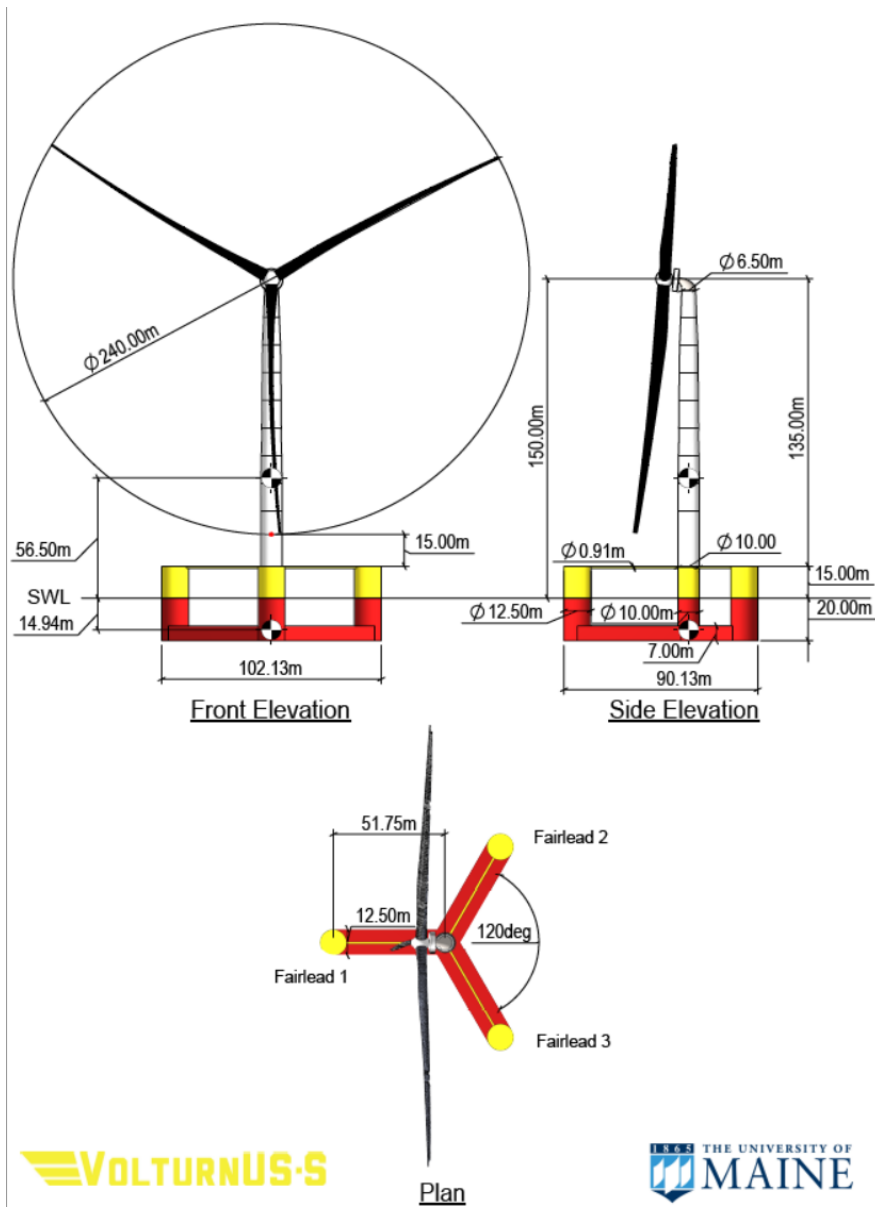


Figure 2: The 15MW floating support structure designed by the University of Maine (Source: [5])

4.2 SUBSYSTEMS' DETAILS AND STAGING NEEDS

In this chapter we provide further information at the subsystems level, addressing the 15MW reference wind turbine blades, drivetrain (and hub assembly) and tower (the floating tower in this case). For each subsystem we also evaluate its port staging needs in terms of its footprint (called "surface area") and its ground pressure. When the ground pressure is less than the affordable limit of the staging area, then the subsystems can be piled vertically to claim less space. This is, for instance, the blades case.

4.2.1 Blades

Important blade properties are listed in Table 4. The mass of 65.25t and the length 117m. The root diameter is 5.2m and the maximum chord 5.77m. The tip prebend is 4m. If the blade was to be stored in a box, the box dimensions would be the blade length, the maximum chord (as the width) and the root radius plus the tip prebend as the height. These dimensions are listed in Table 5. The footprint of the box (or surface area) is the product of its length and height. If the surface pressure of the box on the ground is assumed uniformly distributed, then its measure derives by dividing the blade weight by the surface area. The surface area and pressure are characteristic properties for the staging needs of the dry components of the reference wind turbine.

Table 4: Key parameters for the 15MW reference wind turbine blades

| Blade Properties | | |
|----------------------------------|--------------|--------------|
| Parameter | Units | Value |
| Blade length | m | 117 |
| Root diameter | m | 5.2 |
| Root cylinder length | m | 2.34 |
| Max chord | m | 5.77 |
| Max chord spanwise position | m | 27.2 |
| Tip prebend | m | 4 |
| Precone | deg | 4 |
| Blade mass | t | 65.25 |
| Blade center of mass | m | 26.8 |
| Operational | | |
| Design tip-speed ratio | - | 9 |
| First flapwise natural frequency | Hz | 0.555 |
| First edgewise natural frequency | Hz | 0.642 |
| Design CP | - | 0.489 |
| Design CT | - | 0.799 |

Table 5: Staging needs for the 15MW reference wind turbine blades

| Blade box dimensions & Weight | | |
|--|------------------|-------|
| <i>Length</i> | m | 117 |
| <i>Width</i> | m | 6 |
| <i>Height</i> | m | 7 |
| <i>Weight</i> | t | 65.25 |
| <i>Surface Area</i> | m ² | 675 |
| <i>Surface pressure</i> | t/m ² | 0.10 |

4.2.2 Drivetrain and Hub

Similar considerations to those presented above for the blades apply for the drivetrain and the hub. Table 6 and Table 7 list the relevant values. Table 6 shows lumped masses for the nacelle assembly as provided in [1] and calculated using [4]. It is seen that the nacelle and hub masses estimated with two different approaches are quite close.

Table 6: Key parameters for the 15MW reference wind turbine drivetrain and hub

| Lumped Masses for the Nacelle Assembly | | IEA 15-MW Turbine | Innwind.EU |
|---|-----------------|--------------------------|-------------------|
| Name | Units | Mass | Mass |
| Yaw system | t | 100 | |
| Turret nose | >> | 11 | |
| Inner generator stator | >> | 227 | |
| Outer generator rotor | >> | 145 | |
| Shaft | >> | 16 | |
| Hub | >> | 190 | 194 |
| Bedplate | >> | 70 | 58 |
| Flanges and misc. equipment | >> | 54 | |
| Bearings | >> | 8 | |
| Nacelle total | >> | 821 | 869 |
| Nacelle total minus hub | >> | 631 | 675 |
| Main Shaft Dimensions and Bearings | | | |
| Description | Units | Value | |
| Shaft tilt angle | deg | 6 | |
| Length of main shaft | m | 2.2 | |
| Outer radius of the main shaft | m | 3 | |
| Inner radius of the main shaft | m | 2.8 | |
| Location of generator stator from bedplate flange | m | 0.25 | |
| Turret center of mass | m | 1.2 | |
| Distance of downwind bearing from bedplate flange | m | 0.9 | |
| Turret length | m | 2.2 | |
| Outer radius of the turret | m | 2.2 | |
| Inner radius of the turret | m | 2 | |
| Tapered double outer ring (TDO) mass | kg | 2230 | |
| Spherical roller bearing (SRB) mass | kg | 5664 | |
| Bedplate Properties | | | |
| Description | Units | Value | |
| Tower-top (bedplate base diameter) | m | 6.5 | |
| Bedplate wall thickness | mm | 50 | |
| Bedplate length w/o turret | m | 8.3 | |
| Bedplate mass | t | 70.3 | |
| <i>Bedplate length with turret</i> | m | 10.5 | |
| <i>Bedplate width</i> | m | 6.5 | |
| <i>bedplate height</i> | m | 6.0 | |
| Directdrive Generator Properties | | | |
| Description | Units | Value | |
| Air-gap radius | m | 5.1 | |
| Core length | m | 2.2 | |
| Generator mass | t | 372 | |
| <i>Generator Diameter</i> | m | 13 | |
| <i>Generator height</i> | m | 4 | |
| Hub Properties | | | |
| Diameter | m | 7.94 | |

Table 7: Staging needs for the 15MW reference wind turbine drivetrain and hub

| Nacelle-hub Assembly Dimensions & Weight | | |
|---|------------------|------|
| Length | m | 19 |
| Width | m | 13 |
| Height | m | 13 |
| Weight | t | 821 |
| Surface Area | m ² | 245 |
| Surface pressure | t/m ² | 3.35 |

4.2.3 Floating Tower

A similar analysis is performed for the floating tower and the outcome is shown in Table 8 and Table 9. The overall tower height is 129.5m comprising 10 parts of 13m each (except for the tower top part which is slightly shorter). Each part is flanged at its top and bottom area to be assembled with its neighbours. The top part supports the yaw ring and the bedplate above it. The mean weight of each of the 10 tower parts is 126.3t.

Table 8: Key parameters for the 15MW reference wind turbine floating tower

| Floating Tower Properties | | |
|--|-------|-------|
| Parameter | Units | Value |
| Mass | t | 1,263 |
| Length | m | 129.5 |
| Base Outer Diameter | m | 10 |
| Top Outer Diameter | m | 6.5 |
| Base thickness | mm | 83.0 |
| Top thickness | mm | 21.2 |
| No of substructures (flange to flange) | - | 10 |
| Length of substructures | m | 13 |
| 1st Fore-Aft Bending Mode | Hz | 0.496 |
| 1st Side-Side Bending Mode | Hz | 0.483 |

Table 9: Staging needs for the 15MW reference wind turbine floating tower

| Tower box dimensions & Weight | | |
|--|------------------|-------|
| No of sub-elements per tower | - | 10 |
| Length | m | 13 |
| Width | m | 10 |
| Height | m | 10 |
| Weight (mean value) | t | 126.3 |
| Surface Area | m ² | 130 |
| Surface pressure | t/m ² | 0.97 |

5 HARBOUR NEEDS

5.1 REFERENCE TURBINE AND WIND FARM STAGING NEEDS

The staging needs for the dry parts of the reference turbine are summed up in Table 10. The net staging space needed per 15MW turbine when the individual subsystems are not piled-up is 3,570 m². For 20 such turbines comprising the 300MW reference wind farm the net needed space is 71,408 m². Assuming a 3.5 net to gross factor for the spacing needs, so that the individual pieces can be accessed and transported, the gross value of the staging space of the reference wind farm becomes 250,000 m², or 25 Ha.

Table 10: Staging needs for the reference wind turbine and wind farm

| NET STAGING NEEDS | m ² |
|---------------------------------|----------------|
| Per 15MW Turbine | 3,570 |
| 3 Blades | 2,025 |
| Nacelle-hub | 245 |
| Tower | 1,300 |
| 300MW Wind Farm (20 WTG) | 71,408 |
| | |
| Net to gross factor | 3.5 |
| 300MW Wind Farm GROSS | 250,000 |

5.2 SOIL BEARING CAPACITY

The highest value of surface pressure we have estimated for the dry components of the reference wind turbine is 3.35t/m² for the nacelle-hub assembly, weighting 821 t. This surface pressure derives if the total weight will uniformly transfer to the ground, which is not true given the geometrical particularity of the substructure. We anticipate that the weight load will be undertaken by the ¼ of the projected area, leading to a soil bearing capacity of 4*3.35 ~ 13.5 t/m². The soil bearing capacity of the areas where the blades and the tower substructures will be stored can be less.

Cranes will be needed for the assembly of the dry parts of the turbines. The heaviest single component to be lift-up is again the nacelle-hub assembly. It is anticipated that the soil bearing capacity under the crane-base area must be of the order of 35 t/m².

5.3 DRAFT

Assuming that the floater will be transferred with tag boats having the turbine assembled on top and its fixed ballast in place, the total system mass will be 8,700 t (fixed ballast 2,540 t, hull steel mass 3,140 t, tower mass 1,263 t and RNA 991t). The draft of the fully assembled and moored turbine is 20m where the total system mass, including the water ballast is 20,000 t. It is reasonable to assume that (the less than half-weighted) system during its transfer will have a draft around 10m. Adding a 2m margin to that, we come to a minimum harbour draft of 12m. Evidently, this minimum draft requirement refers to the considered floating platform. Different types of floating platforms may require higher or lower minimum draft values.

6 CONCLUSIONS

This report defines two typical Greek offshore wind farms and a reference turbine. The reference wind farms address medium (50m) and higher (200m) sea depths. The installed capacity is 300MW in both cases. The turbines offshore support structures are jackets in the first case and semisubmersible floaters with catenary mooring lines in the second. The metocean conditions assumed for the two cases are typical for Aegean Sea. The bottom-fixed site has a mean annual wind speed of 8.2m/s, significant wave height 0.8m and wave peak period 4.2s. The floating site is rougher, with mean annual wind speed of 9.6m/s, significant wave height of 1.2m and peak period 5.0s.

The IEA 15MW offshore wind turbine is selected as the reference turbine. It is a typical three-bladed upwind design, with variable speed and pitch control, having a rotor diameter of 240m and hub-height 150m.

Using the reference wind farm(s) and turbine characteristics one can obtain a set of prerequisites / technical specifications (weights, staging area, minimum water depth, etc) necessary for assessing the specific needs for harbours and the elements of the supply chain. It is seen, for instance, that the development of the 300MW reference wind farm an area of 25Ha is needed as a minimum for the staging of the dry wind turbines' components, the bearing capacity of the staging soil might need strengthening to host heavy equipment, while the exit from the harbour should support a minimum draft of 12m (it might be less for other floater designs and assembly practices).

References

1. Global Wind Atlas 3.0, a free, web-based application developed, owned and operated by the Technical University of Denmark (DTU). The Global Wind Atlas 3.0 is released in partnership with the World Bank Group, utilizing data provided by Vortex, using funding provided by the Energy Sector Management Assistance Program (ESMAP). For additional information: <https://globalwindatlas.info>
2. Soukissian, T., Hatzinaki, M., Korres, G., Papadopoulos, A., Kallos, G., Anadranistakis, E., 2007: Wind and Wave Atlas of the Hellenic Seas, Hellenic Centre for Marine Research Publ., 300 pp.
3. Gaertner, Evan, Jennifer Rinker, Latha Sethuraman, Frederik Zahle, Benjamin Anderson, Garrett Barter, Nikhar Abbas, Fanzhong Meng, Pietro Bortolotti, Witold Skrzypinski, George Scott, Roland Feil, Henrik Bredmose, Katherine Dykes, Matt Shields, Christopher Allen, and Anthony Viselli. 2020. Definition of the IEA 15-Megawatt Offshore Reference Wind. Golden, CO: National Renewable Energy Laboratory. NREL/TP-5000-75698. <https://www.nrel.gov/docs/fy20osti/75698.pdf>.
4. Deliverable 1.21 - INNWIND.EU Cost Model, <http://www.innwind.eu/publications/deliverable-reports>.
5. Allen, Christopher, Anthony Viselli, Habib Dagher, Andrew Goupee, Evan Gaertner, Nikhar Abbas, Matthew Hall, and Garrett Barter. Definition of the UMaine VoltturnUS-S Reference Platform Developed for the IEA Wind 15-Megawatt Offshore Reference Wind Turbine. Golden, CO: National Renewable Energy Laboratory. NREL/TP-5000-76773. <https://www.nrel.gov/docs/fy20osti/76773.pdf>.